

Source Units

CAPRI

ITALIAN SYMPHONY OF ELEGANCE AND HI-END AUDIO MASTERY



Qualcomm[®]
aptX[®] HD

Introducing



“Capri,” the epitome of elegance and sophistication in hi-end audio sources. Inspired by the breathtaking beauty and luxurious atmosphere of the namesake island, the Capri Hi-End Source is a true masterpiece that transcends ordinary audio experiences. With meticulous attention to detail and uncompromising craftsmanship, the Capri Hi-End Source by Hertz represents the pinnacle of audio engineering. Engineered to deliver superior sound quality and withstand the harsh marine environment, this top-of-the-line audio source is designed to elevate your boating experience to new heights. With a focus on high-resolution audio, CAPRI ensures that every note, every detail, and every nuance of your favorite music is reproduced with stunning clarity and fidelity, allowing you to immerse yourself in a true audiophile-grade experience on the water.

SPECIFICATION

DISPLAY	4.3" COLOR TFT IPS
PEAK POWER @ 4 Ohm	CLASS-D: 4 x 70 W
FRONT PANEL IP RATING	IP67
MULTI-ZONE	4
LINE OUT (RCA)	4x L+R (one per zone) - HPF: ALL, 60, 80, 100 Hz
SUBWOOFER OUT (RCA)	4x (LPF: ALL, 60, 80, 100 Hz)
AUX INPUT (RCA)	1x L+R
S/PDIF DIGITAL IN	Toslink (24 bit/96 kHz)
S/PDIF DIGITAL OUT	Coaxial (24 bit/96 kHz)
EQUALIZER	CUSTOM 8 BANDS for each zone
EQ. PRESET	8
CAMERA IN	Yes
BATTERY VOLTAGE GAUGE	Yes

SOURCES



Elettromedia
62018 Potenza Picena (MC) Italy
T +39 0733 870 870 - F +39 0733 870 880
elettromedia.com

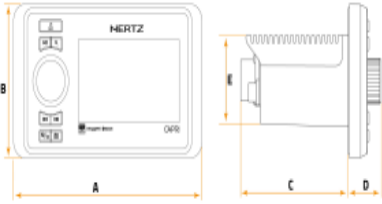
HERTZ

TUNER	AM/FM (RDS) (EU/US) Weather band
USB	Yes (2A)
IPOD/IPHONE	Yes
DAB+	Ready
SIRIUSXM READY	Yes
BLUETOOTH	5.1 Audio streaming with ID3 Tag Display LDAC – AAC – APTX HD
REMOTE CONTROL	HMC HD1 (up to 4 zones) HMC U1 (up to 2 zones)

SIZE & MOUNTING

Unit Size mm (in.)	W 146 (5.748) x H 105 (4.134) x D 121 (4.763)
Mounting Hole size mm (in.)	W 122 (4.8) x H 52 (2.05)
Mounting Depth mm (in.)	99 (3.89)
Mounting Method	Panel mount (4 screws)

PHYSICAL SPECS

		
A	178.5 - 7.023 (mm - in.)	
B	101 - 3.57 (mm - in.)	
C	104 - 4.09 (mm - in.)	
D	31 - 1.22 (mm - in.)	
E	60 - 2.36 (mm - in.)	

All the specifications subject to change without notice_20.A