

Figure 6

Hydraulic Tubing

but with ferrule

90° Elbow

Pipe Nipple

INDUSTRIAL
1521 NE WILSON
TELEPHONE: (075) 647 45 45
TELEFAX: (075) 621 36 63
E-MAIL: info@technautics.nl
INTERNET: www.technautics.nl

technautics bv

min length 340 mm
slag 64 mm

#14 x 1-1/2" Screws

ACTUATOR

#10 x 1-1/4" Screws

Transom

1/4-20 x 3/4" Machine Screws

65 mm

Straightedge

1/2" for 9" Chord

5/8" for 12" Chord

Pilot holes for mounting screws and test. If the pilot holes are too tight, enlarge

TIP: Run a screw into, or fix a block of wood to the straight edge to hold tab at the correct negative angle.


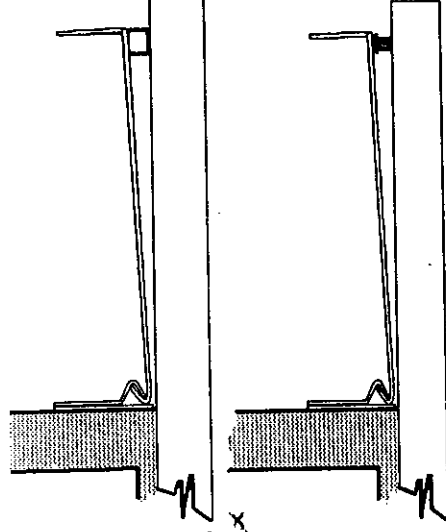


Figure 7

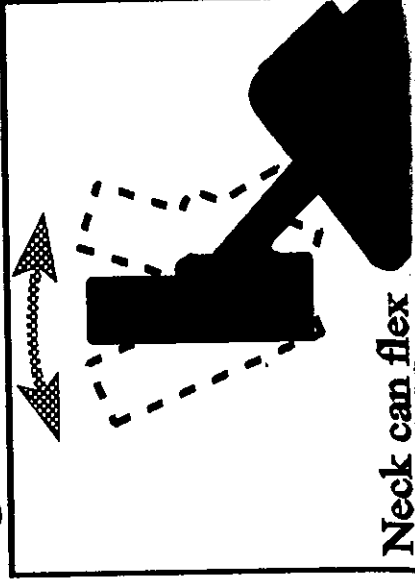

Neck can flex