


1. PACKAGING CONTENTS


PORTOFINO 65 XW



PORTOFINO 77 XW


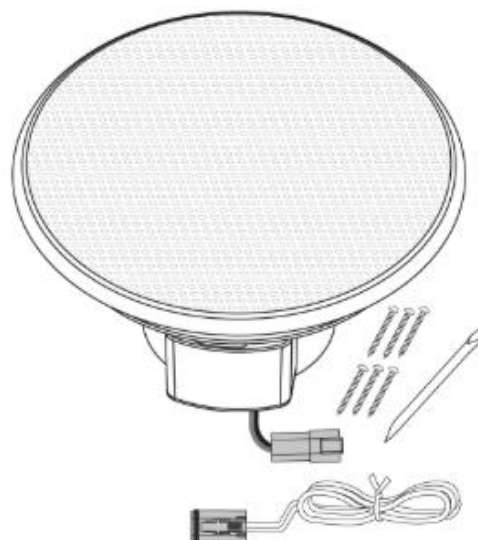


**PORTOFINO 100 S2W /
PORTOFINO 100 S4W**


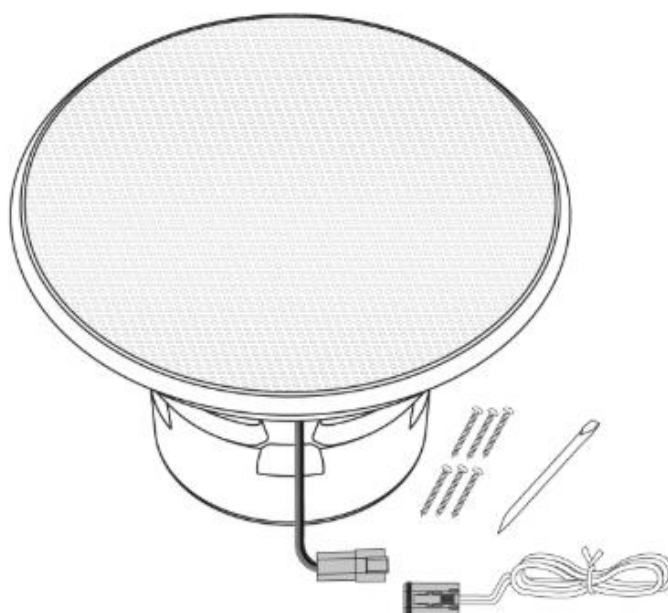


2. DIMENSIONS

PORTOFINO 65 XW / PORTOFINO 77 XW

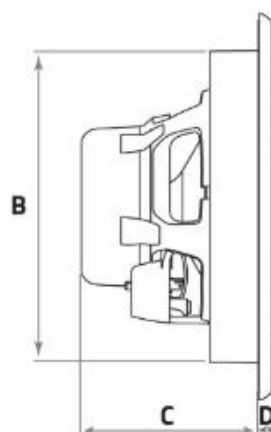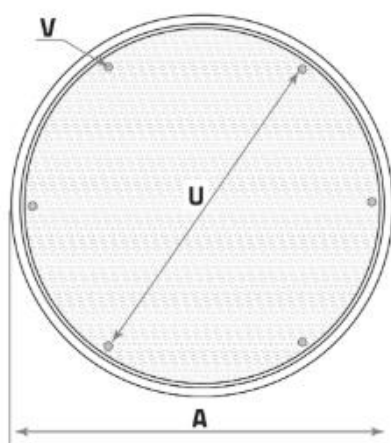

PORTOFINO 100 S2W / PORTOFINO 100 S4W

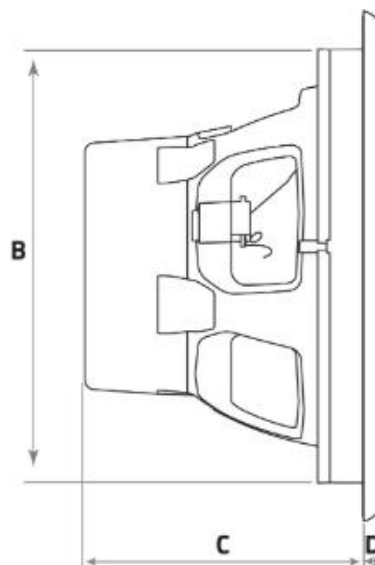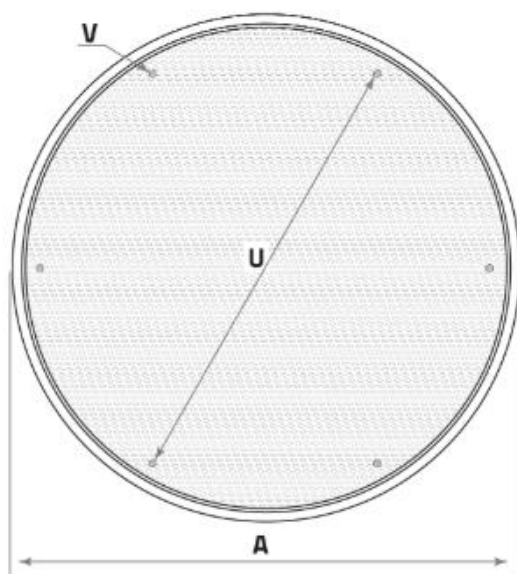


	A	B	C	D	U	V	
PORTOFINO 65 XW	212	171	97.3	9	188	4.5	mm
	8.35	6.73	3.83	0.35	7.40	0.18	in.
PORTOFINO 77 XW	232	190.5	108	9	208	4.5	mm
	9.13	7.5	4.25	0.35	8.19	0.18	in.
PORTOFINO 100 S2 XW	319	271.3	174	11.6	291	5.5	mm
	12.56	10.68	6.85	0.46	0.11	0.22	in.
PORTOFINO 100 S4 XW	319	271.3	174	11.6	291	5.5	mm
	12.56	10.68	6.85	0.46	0.11	0.22	in.

3. MOUNTING

PORTOFINO 65 XW / PORTOFINO 77 XW / PORTOFINO 100 S2W / PORTOFINO 100 S4W

HOW TO REMOVE / INSERT MESH GRILLE

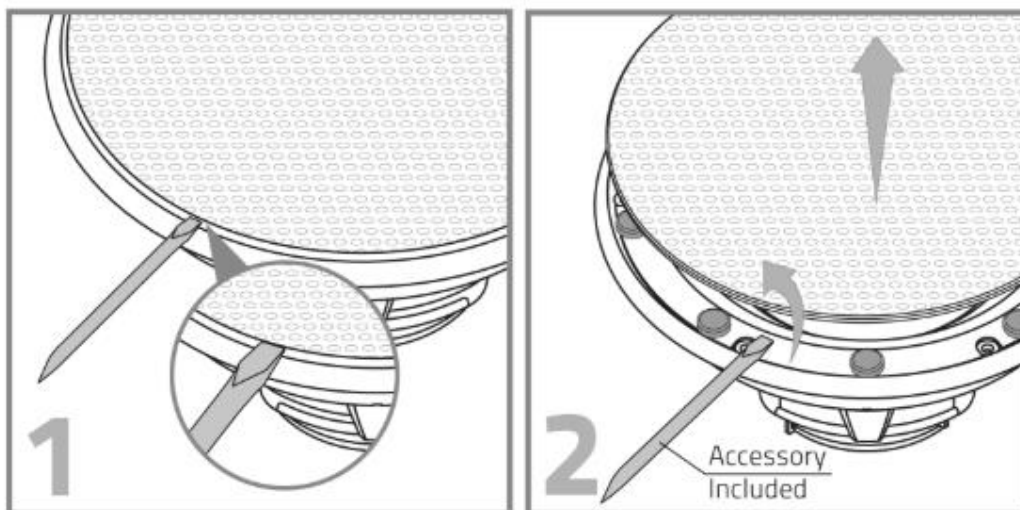


WARNING:




Pay attention not to damage the surround.


1

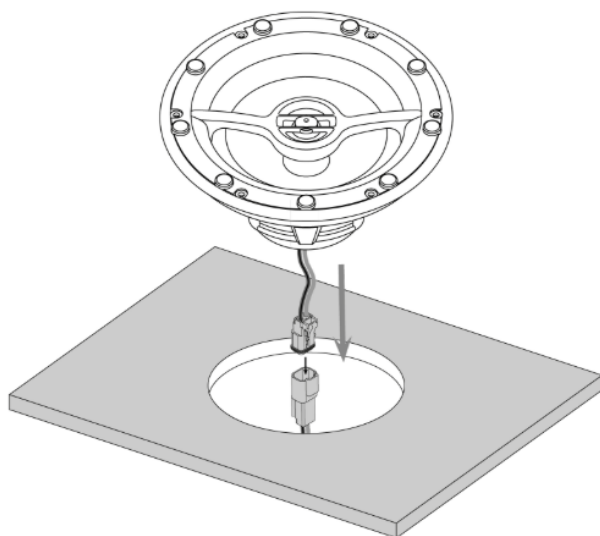


2

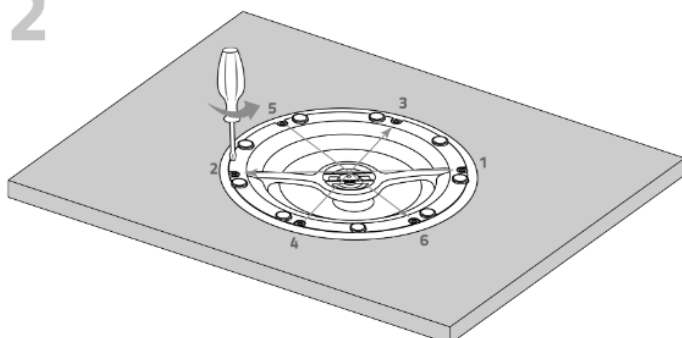



3

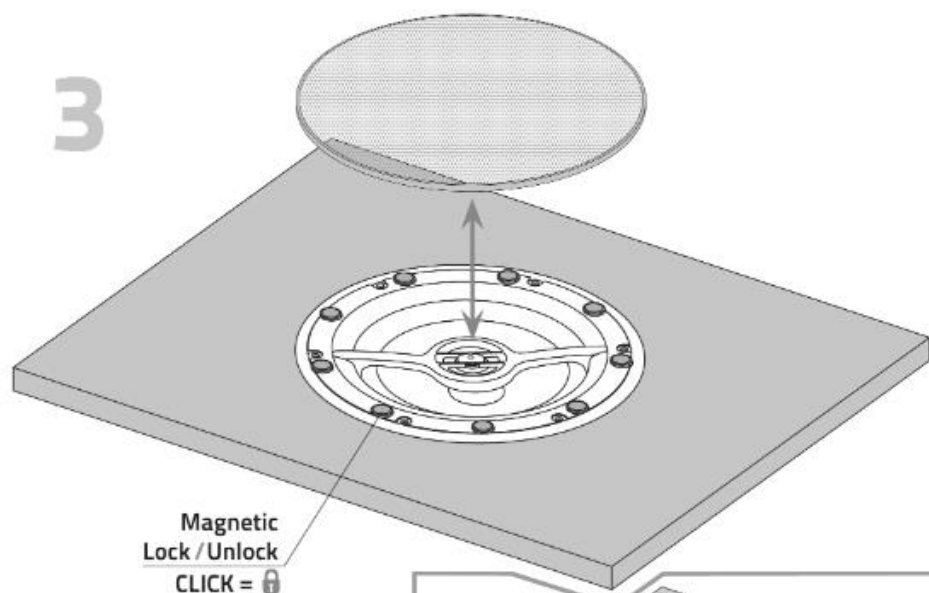

4

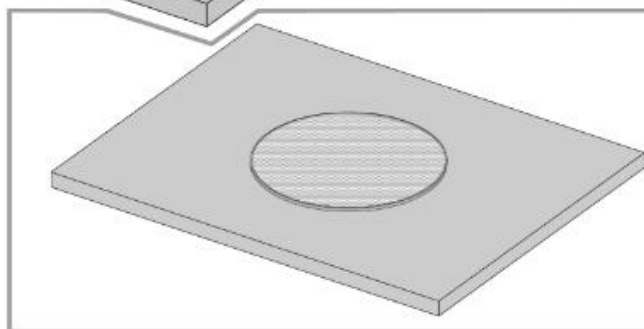


4. CONNECTIONS

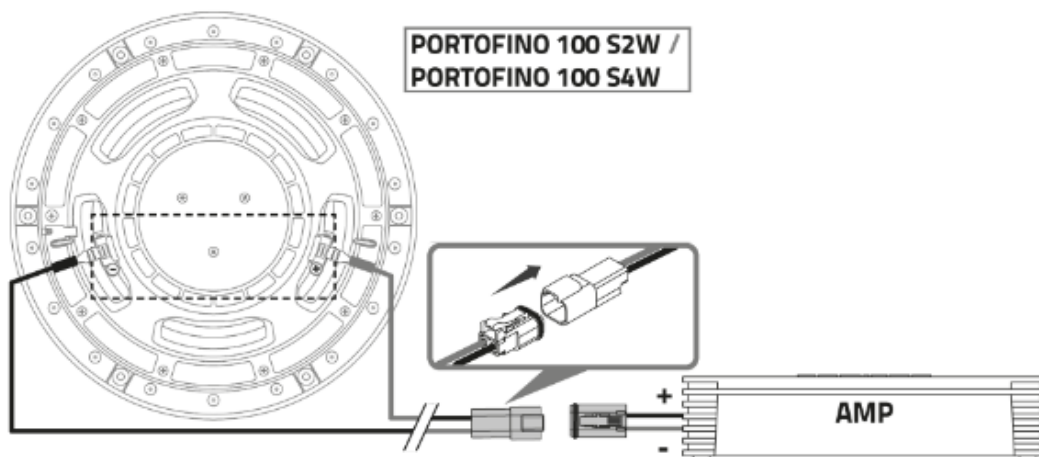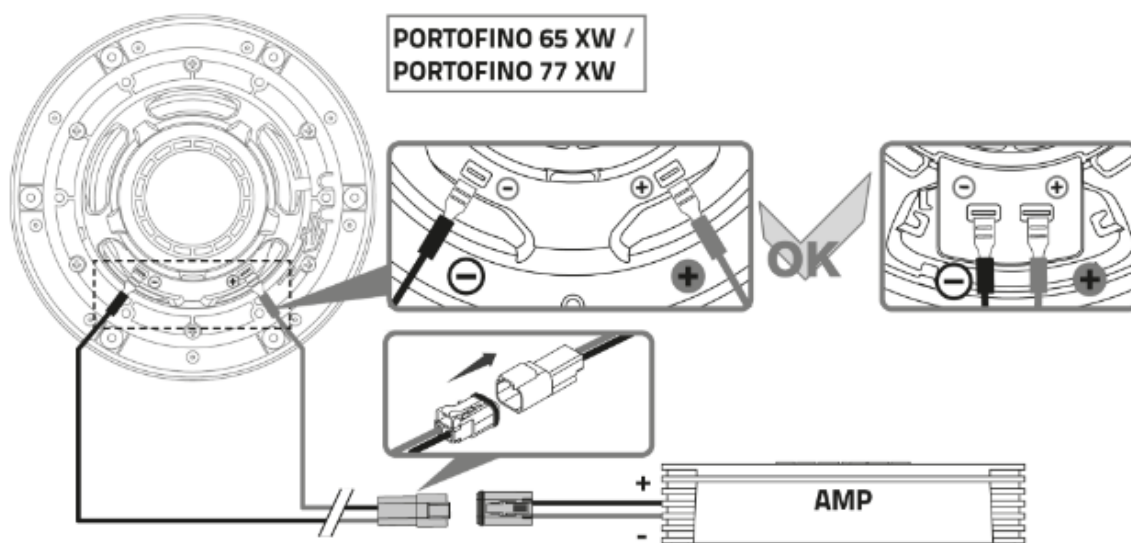

FEMALE CONNECTOR WIRE SIDE



1	White / SPK +
2	Black / SPK -

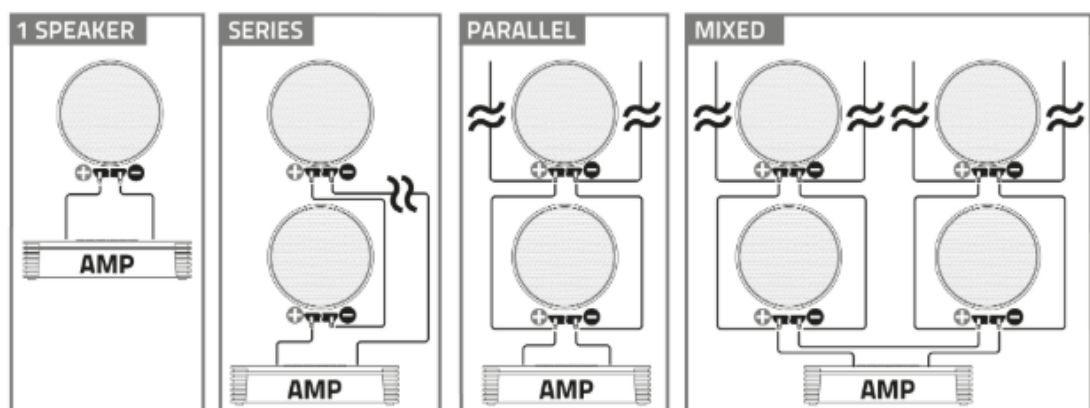

FREE AIR DC RESISTANCE		PORTOFINO 65 XW	PORTOFINO 77 XW	PORTOFINO 100 S2 XW	PORTOFINO 100 S4 XW	
	1 Speaker	3.5	3.3	2.2	4.4	Ω
SERIES	2 Speaker	7	6.6	4.4	8.8	Ω
	3 Speaker	10.5	9.9	6.6	13.2	Ω
	4 Speaker	14	13.2	8.8	17.6	Ω
PARALLEL	2 Speaker	1.8	1.7	1.1	2.2	Ω
	3 Speaker	1.2	1.1	0.7	1.47	Ω
	4 Speaker	0.9	0.8	0.55	1.1	Ω
MIXED	4 Speaker	3.5	3.3	2.2	4.4	Ω
	6 Speaker	2.3	2.2	3.3	6.6	Ω
	8 Speaker	1.8	1.6	4.4	8.8	Ω